


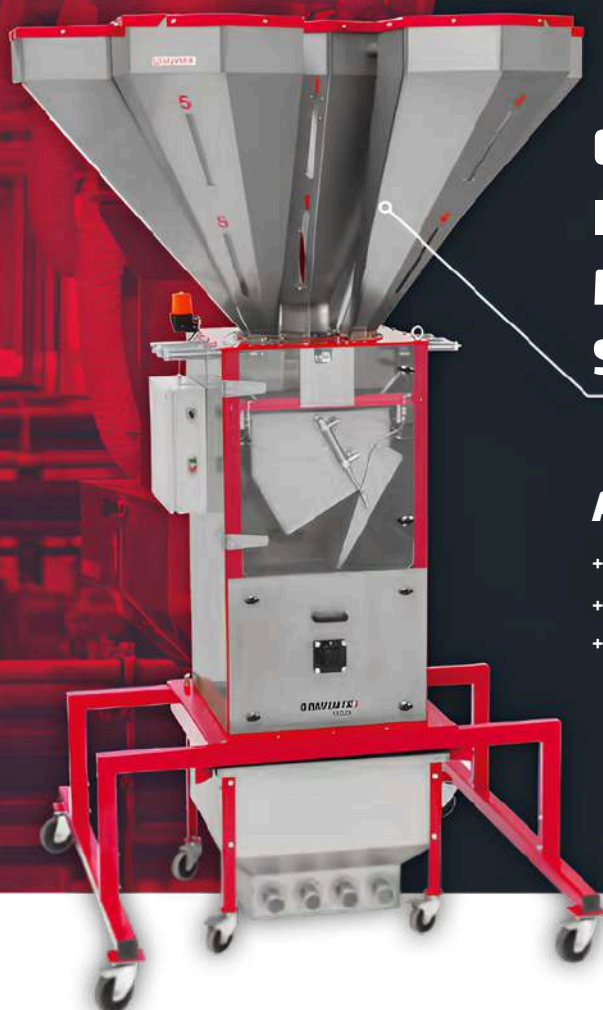


EXTRUSION INJECTION MOULAGE PAR SOUFFLAGE

Avantages


- + Nombre de composants : 1 à 8
- + Contrôles étendus
- + Option d'intégration MES/ERP/SCADA

➤ OPTIONS

- | | |
|---|---|
| • Version haute température (PET) | • Capteurs de niveau bas dans les trémies |
| • Ionisation dans la chambre de mélange | • Trémies amovibles |
| • Agitateur | • Fonctionnement économique |
| • Trémie pour broyé | • FerlinBridge |
| • Contrôle du broyé | • Broyé / solutions pour broyé |
| • Contrôle du ratio additif/broyé | • Vidange de la trémie |
| • Vibreur pneumatique | • Alarme sonore |
| • Bouton marche/arrêt | • Fonction de séchage |
| • Pistolet à air comprimé | • Raccordements MOVAC |

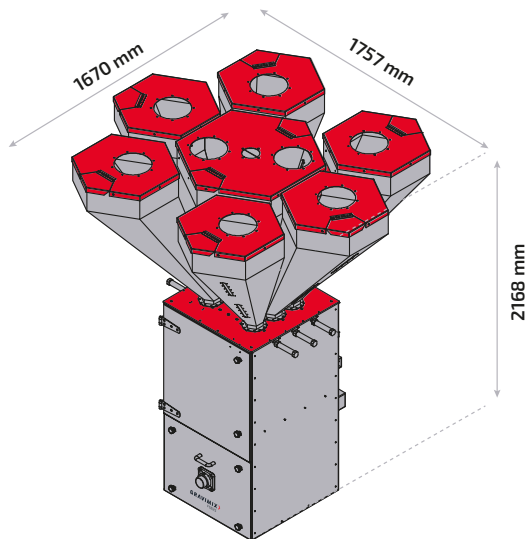

FGB 25

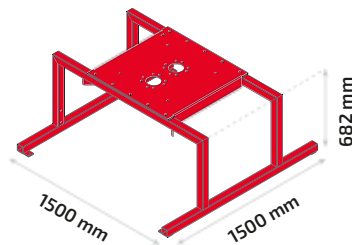

CHÂSSIS FGB 25



SPÉCIFICATIONS

MORE PRODUCT INFORMATION?

SCAN THE QR-CODE



Batch weight	kg	25
Number of components	max.	8
Hopper capacity	litre	190 (of 2 x 95)
Mixing chamber capacity	litre	99
Supply voltage	V/Hz	400, 50/60 (3P+N+E)
Power consumption	kW	0,8
Compressed air	Bar	6
Compressed air consumption approx.	l/min	250
Weight approx.	kg	400

VERSIONS

WANT TO SEE MORE VERSIONS?

SCAN THE QR-CODE



TYPES	CAPACITÉ	COMPOSANTS
FGB 25-2/0	3210	2
FGB 25-3/0	2800	3
FGB 25-4/0	2725	4
FGB 25-5/0	2300	5
FGB 25-6/0	2100	6
FGB 25-7/0	1950	7
FGB 25-8/0	1800	8